




Sellos y Retenes de San Luis, S.A. de C.V.

CP - Piston Seals

Lubrithane/Nitrile

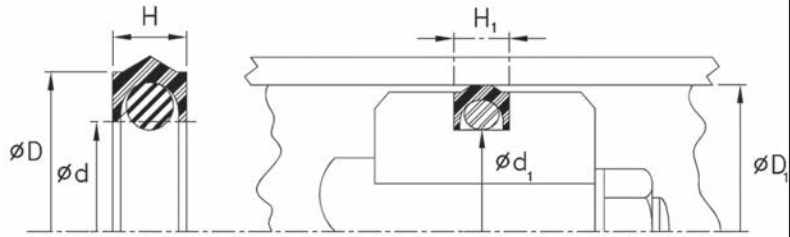

Temperature: -65/220F [-54/104C]

Pressure: 5000 PSI [345 BAR]

Ref.Number	Rod diameter		Nominal Seal Dimensions			Housing Dimensions					
		Tol.	D	d	H	D1	Tol.	d1	Tol.	H1	Tol.
CP-106	0.375	+0.002 / -0.000	0.375	0.187	0.115	0.375	+0.002 / -0.000	0.188	+0.000 / -0.002	0.150	+0.005 / -0.000
CP-108	0.437	+0.002 / -0.000	0.437	0.250	0.115	0.437	+0.002 / -0.000	0.250	+0.000 / -0.002	0.150	+0.005 / -0.000
CP-109	0.500	+0.002 / -0.000	0.500	0.312	0.115	0.500	+0.002 / -0.000	0.313	+0.000 / -0.002	0.150	+0.005 / -0.000
CP-203	0.562	+0.002 / -0.000	0.562	0.312	0.150	0.562	+0.002 / -0.000	0.315	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-204	0.625	+0.002 / -0.000	0.625	0.375	0.150	0.625	+0.002 / -0.000	0.378	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-205	0.687	+0.002 / -0.000	0.687	0.437	0.150	0.687	+0.002 / -0.000	0.440	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-206	0.750	+0.002 / -0.000	0.750	0.500	0.150	0.750	+0.002 / -0.000	0.503	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-207	0.812	+0.002 / -0.000	0.812	0.562	0.150	0.812	+0.002 / -0.000	0.565	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-208	0.875	+0.002 / -0.000	0.875	0.625	0.150	0.875	+0.002 / -0.000	0.628	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-209	0.937	+0.002 / -0.000	0.937	0.687	0.150	0.937	+0.002 / -0.000	0.690	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-210	1.000	+0.002 / -0.000	1.000	0.750	0.150	1.000	+0.002 / -0.000	0.754	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-211	1.062	+0.002 / -0.000	1.062	0.812	0.150	1.062	+0.002 / -0.000	0.816	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-212	1.125	+0.002 / -0.000	1.125	0.875	0.150	1.125	+0.002 / -0.000	0.879	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-213	1.187	+0.002 / -0.000	1.187	0.937	0.150	1.187	+0.002 / -0.000	0.941	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-214	1.250	+0.002 / -0.000	1.250	1.000	0.150	1.250	+0.002 / -0.000	1.004	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-215	1.312	+0.002 / -0.000	1.312	1.062	0.150	1.312	+0.002 / -0.000	1.066	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-215/F	1.312	+0.002 / -0.000	1.312	1.062	0.150	1.312	+0.002 / -0.000	1.066	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-216	1.375	+0.002 / -0.000	1.375	1.125	0.150	1.375	+0.002 / -0.000	1.129	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-217	1.437	+0.002 / -0.000	1.437	1.187	0.150	1.437	+0.002 / -0.000	1.191	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-218	1.500	+0.002 / -0.000	1.500	1.250	0.150	1.500	+0.002 / -0.000	1.254	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-218-2	1.500	+0.002 / -0.000	1.500	1.250	0.265	1.500	+0.002 / -0.000	1.254	+0.000 / -0.002	0.304	+0.005 / -0.000

NOTE: MINIMUM LINE ORDER MAY APPLY





Sellos y Retenes de San Luis, S.A. de C.V.

CP SERIES - LUBRITHANE/NBR

INCH SIZE
PISTON SEALS



Ref.Number	Rod diameter	Nominal Seal Dimensions			Housing Dimensions						
	Tol	D	d	H	D1	Tol	d1	Tol	H1	Tol	
CP-219	1.562	+0.002 / -0.000	1.562	1.312	0.150	1.562	+0.002 / -0.000	1.316	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-220	1.625	+0.002 / -0.000	1.625	1.375	0.150	1.625	+0.002 / -0.000	1.379	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-221	1.687	+0.002 / -0.000	1.687	1.437	0.150	1.687	+0.002 / -0.000	1.441	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-222	1.750	+0.002 / -0.000	1.750	1.500	0.150	1.750	+0.002 / -0.000	1.504	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-222-2	1.750	+0.002 / -0.000	1.750	1.500	0.265	1.750	+0.002 / -0.000	1.504	+0.000 / -0.002	0.304	+0.005 / -0.000
CP-228	2.500	+0.002 / -0.000	2.500	2.250	0.150	2.500	+0.002 / -0.000	2.254	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-232	3.000	+0.002 / -0.000	3.000	2.750	0.150	3.000	+0.002 / -0.000	2.754	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-233	3.125	+0.002 / -0.000	3.125	2.875	0.150	3.125	+0.002 / -0.000	2.879	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-237	3.625	+0.002 / -0.000	3.625	3.375	0.150	3.625	+0.002 / -0.000	3.379	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-240	4.000	+0.002 / -0.000	4.000	3.750	0.150	4.000	+0.002 / -0.000	3.754	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-252	5.500	+0.002 / -0.000	5.500	5.250	0.150	5.500	+0.002 / -0.000	5.254	+0.000 / -0.002	0.185	+0.005 / -0.000
CP-324	1.750	+0.002 / -0.000	1.750	1.375	0.255	1.750	+0.002 / -0.000	1.375	+0.000 / -0.002	0.280	+0.005 / -0.000
CP-325	1.875	+0.002 / -0.000	1.875	1.500	0.255	1.875	+0.002 / -0.000	1.500	+0.000 / -0.002	0.280	+0.005 / -0.000
CP-326	2.000	+0.002 / -0.000	2.000	1.625	0.255	2.000	+0.002 / -0.000	1.625	+0.000 / -0.002	0.280	+0.005 / -0.000
CP-326-2	2.000	+0.002 / -0.000	2.000	1.625	0.370	2.000	+0.002 / -0.000	1.625	+0.000 / -0.002	0.424	+0.005 / -0.000
CP-327	2.125	+0.002 / -0.000	2.125	1.750	0.255	2.125	+0.002 / -0.000	1.750	+0.000 / -0.002	0.280	+0.005 / -0.000
CP-328	2.250	+0.002 / -0.000	2.250	1.875	0.255	2.250	+0.002 / -0.000	1.875	+0.000 / -0.002	0.280	+0.005 / -0.000
CP-329	2.375	+0.002 / -0.000	2.375	2.000	0.255	2.375	+0.002 / -0.000	2.000	+0.000 / -0.002	0.280	+0.005 / -0.000
CP-330	2.500	+0.002 / -0.000	2.500	2.125	0.255	2.500	+0.002 / -0.000	2.125	+0.000 / -0.002	0.280	+0.005 / -0.000
CP-330-2	2.500	+0.002 / -0.000	2.500	2.125	0.370	2.500	+0.002 / -0.000	2.125	+0.000 / -0.002	0.424	+0.005 / -0.000
CP-331	2.625	+0.002 / -0.000	2.625	2.250	0.255	2.625	+0.002 / -0.000	2.250	+0.000 / -0.002	0.280	+0.005 / -0.000
CP-332	2.750	+0.004 / -0.000	2.750	2.375	0.255	2.750	+0.004 / -0.000	2.375	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-332-2	2.750	+0.004 / -0.000	2.750	2.375	0.370	2.750	+0.004 / -0.000	2.375	+0.000 / -0.004	0.424	+0.005 / -0.000
CP-333	2.875	+0.004 / -0.000	2.875	2.500	0.255	2.875	+0.004 / -0.000	2.500	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-334	3.000	+0.004 / -0.000	3.000	2.625	0.255	3.000	+0.004 / -0.000	2.625	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-334-2	3.000	+0.004 / -0.000	3.000	2.625	0.370	3.000	+0.004 / -0.000	2.625	+0.000 / -0.004	0.424	+0.005 / -0.000
CP-335	3.125	+0.004 / -0.000	3.125	2.750	0.255	3.125	+0.004 / -0.000	2.750	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-336	3.250	+0.004 / -0.000	3.250	2.875	0.255	3.250	+0.004 / -0.000	2.875	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-337	3.375	+0.004 / -0.000	3.375	3.000	0.255	3.375	+0.004 / -0.000	3.000	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-338	3.500	+0.004 / -0.000	3.500	3.125	0.255	3.500	+0.004 / -0.000	3.125	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-338-2	3.500	+0.004 / -0.000	3.500	3.125	0.370	3.500	+0.004 / -0.000	3.125	+0.000 / -0.004	0.424	+0.005 / -0.000
CP-339	3.625	+0.004 / -0.000	3.625	3.250	0.255	3.625	+0.004 / -0.000	3.250	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-340	3.750	+0.004 / -0.000	3.750	3.375	0.255	3.750	+0.004 / -0.000	3.375	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-341	3.875	+0.004 / -0.000	3.875	3.500	0.255	3.875	+0.004 / -0.000	3.500	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-342	4.000	+0.004 / -0.000	4.000	3.625	0.255	4.000	+0.004 / -0.000	3.625	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-342-2	4.000	+0.004 / -0.000	4.000	3.625	0.370	4.000	+0.004 / -0.000	3.625	+0.000 / -0.004	0.424	+0.005 / -0.000
CP-343	4.125	+0.004 / -0.000	4.125	3.750	0.255	4.125	+0.004 / -0.000	3.750	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-344	4.250	+0.004 / -0.000	4.250	3.875	0.255	4.250	+0.004 / -0.000	3.875	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-345	4.375	+0.004 / -0.000	4.375	4.000	0.255	4.375	+0.004 / -0.000	4.000	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-346	4.500	+0.004 / -0.000	4.500	4.125	0.255	4.500	+0.004 / -0.000	4.125	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-347	4.625	+0.004 / -0.000	4.625	4.250	0.255	4.625	+0.004 / -0.000	4.250	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-348	4.750	+0.004 / -0.000	4.750	4.375	0.255	4.750	+0.004 / -0.000	4.375	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-349	4.875	+0.004 / -0.000	4.875	4.500	0.255	4.875	+0.004 / -0.000	4.500	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-350	5.000	+0.004 / -0.000	5.000	4.625	0.255	5.000	+0.004 / -0.000	4.626	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-352	5.250	+0.004 / -0.000	5.250	4.875	0.255	5.250	+0.004 / -0.000	4.875	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-354	5.500	+0.004 / -0.000	5.500	5.125	0.255	5.500	+0.004 / -0.000	5.125	+0.000 / -0.004	0.280	+0.005 / -0.000
CP-358	6.000	+0.004 / -0.000	6.000	5.625	0.255	6.000	+0.004 / -0.000	5.625	+0.000 / -0.004	0.280	+0.005 / -0.000

NOTE: MINIMUM LINE ORDER MAY APPLY

