




Sellos y Retenes de San Luis, S.A. de C.V.

CTS - Piston Seals

GF/M.PTFE/Nylon/Nitrile
BR.PTFE/Nylon/Nitrile

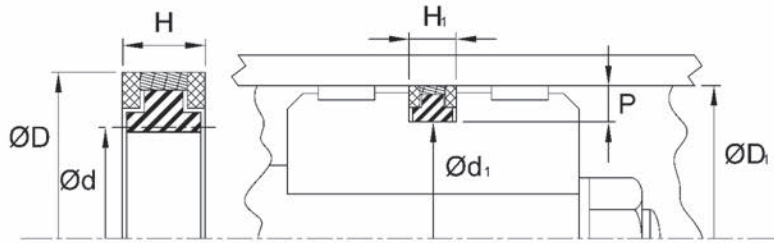

Temperature: -20/220F [-29/104C]

Pressure: 6500 PSI [450 BAR]

Ref.Number	Bore diameter		Nominal Seal Dimensions				Housing Dimensions			
		Tol.	D	d	S	H	d1	Tol.	H1	Tol.
CTS-01000	1.000	+0.003 / -0.000					0.625	+0.000 / -0.002	0.424	+0.010 / -0.000
CTS-01250	1.250	+0.003 / -0.000					0.875	+0.000 / -0.002	0.424	+0.010 / -0.000
CTS-01500	1.500	+0.003 / -0.000					1.125	+0.000 / -0.002	0.424	+0.010 / -0.000
CTS-01750	1.750	+0.003 / -0.000					1.375	+0.000 / -0.002	0.424	+0.010 / -0.000
CTS-02000	2.000	+0.003 / -0.000					1.625	+0.000 / -0.002	0.424	+0.010 / -0.000
CTS-02250	2.250	+0.003 / -0.000					1.875	+0.000 / -0.002	0.424	+0.010 / -0.000
CTS-02500	2.500	+0.003 / -0.000					2.125	+0.000 / -0.002	0.424	+0.010 / -0.000
CTS-02501	2.500	+0.003 / -0.000					1.942	+0.000 / -0.002	0.275	+0.010 / -0.000
CTS-02750	2.750	+0.003 / -0.000					2.375	+0.000 / -0.002	0.424	+0.010 / -0.000
CTS-03000	3.000	+0.004 / -0.000					2.520	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-03250	3.250	+0.004 / -0.000					2.770	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-03251	3.250	+0.004 / -0.000					2.692	+0.000 / -0.003	0.424	+0.010 / -0.000
CTS-03500	3.500	+0.004 / -0.000					3.020	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-03500/B	3.500	+0.004 / -0.000					3.020	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-03750	3.750	+0.004 / -0.000					3.270	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-04000	4.000	+0.004 / -0.000					3.520	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-04001	4.000	+0.004 / -0.000					3.442	+0.000 / -0.003	0.424	+0.010 / -0.000
CTS-04250	4.250	+0.004 / -0.000					3.770	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-04500	4.500	+0.004 / -0.000					4.020	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-04501	4.500	+0.004 / -0.000					3.942	+0.000 / -0.003	0.424	+0.010 / -0.000
CTS-04750	4.750	+0.004 / -0.000					4.270	+0.000 / -0.003	0.579	+0.010 / -0.000
CTS-05000	5.000	+0.004 / -0.000					4.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-05001	5.000	+0.004 / -0.000					4.444	+0.000 / -0.004	0.420	+0.010 / -0.000
CTS-05250	5.250	+0.004 / -0.000					4.520	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-05500	5.500	+0.004 / -0.000					4.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-05501	5.500	+0.004 / -0.000					5.022	+0.000 / -0.004	0.579	+0.010 / -0.000
CTS-05501/B	5.500	+0.004 / -0.000					5.022	+0.000 / -0.004	0.579	+0.010 / -0.000
CTS-05750	5.750	+0.004 / -0.000					5.022	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-06000	6.000	+0.004 / -0.000					5.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-06000/B	6.000	+0.004 / -0.000					5.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-06001	6.000	+0.004 / -0.000					5.522	+0.000 / -0.004	0.579	+0.010 / -0.000
CTS-06250	6.250	+0.004 / -0.000					5.520	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-06500	6.500	+0.004 / -0.000					5.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-06501/B	6.500	+0.005 / -0.000					6.022	+0.000 / -0.004	0.579	+0.010 / -0.000
CTS-06750	6.750	+0.005 / -0.000					6.022	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-07000	7.000	+0.005 / -0.000					6.270	+0.000 / -0.004	0.750	+0.010 / -0.000

NOTE: MINIMUM LINE ORDER MAY APPLY





Sellos y Retenes de San Luis, S.A. de C.V.

CTS SERIES - GF/M & BR.PTFE/NYLON/NBR

INCH SIZE
PISTON SEALS



Ref.Number	Bore diameter		Nominal Seal Dimensions				Housing Dimensions			
		Tol.	D	d	S	H	d1	Tol.	H1	Tol.
CTS-07250	7.250	+0.005 / -0.000					6.520	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-07500	7.500	+0.005 / -0.000					6.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-07500/B	7.500	+0.005 / -0.000					6.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-07510/B	7.510	+0.005 / -0.000					6.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-07520/B	7.520	+0.005 / -0.000					6.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-07530/B	7.530	+0.005 / -0.000					6.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-07750	7.750	+0.005 / -0.000					7.022	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-08000	8.000	+0.005 / -0.000					7.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-08000/B	8.000	+0.005 / -0.000					7.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-08250	8.250	+0.005 / -0.000					7.520	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-08500	8.500	+0.005 / -0.000					7.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-08750	8.750	+0.005 / -0.000					8.022	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-09000	9.000	+0.005 / -0.000					8.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-09000/B	9.000	+0.005 / -0.000					8.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-09500/B	9.500	+0.005 / -0.000					8.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-10000	10.000	+0.005 / -0.000					9.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-10000/B	10.000	+0.005 / -0.000					9.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-11000	11.000	+0.006 / -0.000					10.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-11000/B	11.000	+0.006 / -0.000					10.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-11500/B	11.500	+0.006 / -0.000					10.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-12000	12.000	+0.006 / -0.000					11.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-12500/B	12.500	+0.006 / -0.000					11.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-13000	13.000	+0.006 / -0.000					12.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-13000/B	13.000	+0.006 / -0.000					12.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-13500/B	13.500	+0.006 / -0.000					12.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-14000	14.000	+0.006 / -0.000					13.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-14500/B	14.500	+0.006 / -0.000					13.770	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-15000	15.000	+0.006 / -0.000					14.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-15000/B	15.000	+0.006 / -0.000					14.270	+0.000 / -0.004	0.750	+0.010 / -0.000
CTS-16000/B	16.000	+0.006 / -0.000					15.270	+0.000 / -0.004	0.750	+0.010 / -0.000

CTS SERIES - JOHN DEERE X-REF

Ref.Number	Bore diameter		Nominal Seal Dimensions				Housing Dimensions			
		Tol.	D	d	S	H	d1	Tol.	H1	Tol.
RJD-RE11902	3.250	+0.004 / -0.000					2.770	+0.000 / -0.003	0.579	+0.010 / -0.000
RJD-RE11903	3.500	+0.004 / -0.000					3.020	+0.000 / -0.003	0.579	+0.010 / -0.000
RJD-RE11919	3.750	+0.004 / -0.000					3.270	+0.000 / -0.003	0.579	+0.010 / -0.000
RJD-RE11904	4.000	+0.004 / -0.000					3.520	+0.000 / -0.003	0.579	+0.010 / -0.000
RJD-RE11905	4.500	+0.004 / -0.000					4.020	+0.000 / -0.003	0.579	+0.010 / -0.000
RJD-RE11910	5.000	+0.004 / -0.000					4.270	+0.000 / -0.004	0.750	+0.010 / -0.000
RJD-RE11920	5.500	+0.004 / -0.000					4.770	+0.000 / -0.004	0.750	+0.010 / -0.000
RJD-RE11921	6.000	+0.004 / -0.000					5.270	+0.000 / -0.004	0.750	+0.010 / -0.000

NOTE: MINIMUM LINE ORDER MAY APPLY