




Type B Loaded U-Cups

**Polyurethane/Nitrile
Polyester/Polymyte
FPM**

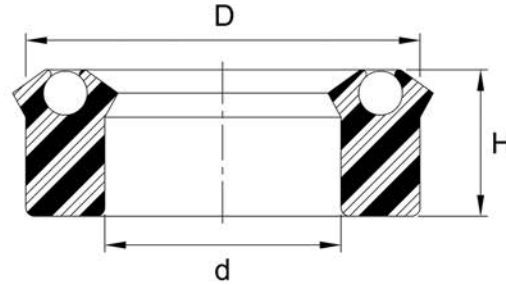

**AU/NBR Temperature: -65/200F [-54/93C]
POLY Temperature: -65/275F [-54/135C]
FPM Temperature: -20/400F [-29/204C]**

Pressure: 5000 PSI [345 BAR]

**INCH SIZE
ROD/PISTON SEALS**

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
1/8" - Cross Section - 0.125"				1/8" - Cross Section - 0.125"			
12500125Q125B	0.125	0.375	0.125	12500750Q250B/V	0.750	1.000	0.250
12500125-250B	0.125	0.375	0.250	12500800-250B	0.800	1.050	0.250
12500187Q125B	0.187	0.437	0.125	12500812-125B	0.812	1.062	0.125
12500187-250B	0.187	0.437	0.250	12500812-250B	0.812	1.062	0.250
12500250Q125B	0.250	0.500	0.125	12500875-125B	0.875	1.125	0.125
12500250-187B	0.250	0.500	0.187	12500875-187B	0.875	1.125	0.187
12500250-250B	0.250	0.500	0.250	12500875-250B	0.875	1.125	0.250
12500250N250B/P	0.250	0.500	0.250	12500937Q125B	0.937	1.187	0.125
12500281-250B	0.281	0.531	0.250	12500937-250B	0.937	1.187	0.250
12500312-125B	0.312	0.562	0.125	12501000-125B	1.000	1.250	0.125
12500312-250B	0.312	0.562	0.250	12501000-156B	1.000	1.250	0.156
12500375-125B	0.375	0.625	0.125	12501000-187B	1.000	1.250	0.187
12500375-187B	0.375	0.625	0.187	12501000N187B/P	1.000	1.250	0.187
12500375-250B	0.375	0.625	0.250	12501000-250B	1.000	1.250	0.250
12500437Q125B	0.437	0.687	0.125	12501000Q250B/V	1.000	1.250	0.250
12500437-250B	0.437	0.687	0.250	12501062Q125B	1.062	1.312	0.125
12500500-125B	0.500	0.750	0.125	12501062-170B	1.062	1.312	0.170
12500500-250B	0.500	0.750	0.250	12501062-250B	1.062	1.312	0.250
12500500Q250B/V	0.500	0.750	0.250	12501125-125B	1.125	1.375	0.125
12500562-125B	0.562	0.812	0.125	12501125-250B	1.125	1.375	0.250
12500562-250B	0.562	0.812	0.250	12501125-312B	1.125	1.375	0.312
12500625-125B	0.625	0.875	0.125	12501187Q178B	1.187	1.437	0.178
12500625Q125B/V	0.625	0.875	0.125	12501187-187B	1.187	1.437	0.187
12500625-187B	0.625	0.875	0.187	12501187-250B	1.187	1.437	0.250
12500625-250B	0.625	0.875	0.250	12501187Q250B/V	1.187	1.437	0.250
12500625Q250B/V	0.625	0.875	0.250	12501250-125B	1.250	1.500	0.125
12500625N250B/P	0.625	0.875	0.250	12501250-187B	1.250	1.500	0.187
12500687Q125B	0.687	0.937	0.125	12501250-250B	1.250	1.500	0.250
12500687-250B	0.687	0.937	0.250	12501250Q250B/V	1.250	1.500	0.250
12500750-125B	0.750	1.000	0.125	12501250N250B/P	1.250	1.500	0.250
12500750V125B/P	0.750	1.000	0.125	12501312Q125B	1.312	1.562	0.125
12500750-187B	0.750	1.000	0.187	12501312-187B	1.312	1.562	0.187
12500750-250B	0.750	1.000	0.250	12501375-125B	1.375	1.625	0.125

NOTE: MINIMUM LINE ORDER MAY APPLY





**INCH SIZE
ROD/PISTON SEALS**

B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
1/8" - Cross Section - 0.125"				3/16" - Cross Section - 0.187"			
12501375-178B	1.375	1.625	0.178	18700250-312B	0.250	0.625	0.312
12501375-187B	1.375	1.625	0.187	18700312-187B	0.312	0.687	0.187
12501375-250B	1.375	1.625	0.250	18700312-312B	0.312	0.687	0.312
12501375-250B/V	1.375	1.625	0.250	18700375-187B	0.375	0.750	0.187
12501437-125B	1.437	1.687	0.125	18700375-312B	0.375	0.750	0.312
12501437-250B	1.437	1.687	0.250	18700437-312B	0.437	0.812	0.312
12501500-125B	1.500	1.750	0.125	18700500Q187B	0.500	0.875	0.187
12501500-187B	1.500	1.750	0.187	18700500-250B	0.500	0.875	0.250
12501500-250B	1.500	1.750	0.250	18700500-312B	0.500	0.875	0.312
12501625-125B	1.625	1.875	0.125	18700500N312B/P	0.500	0.875	0.312
12501625-187B	1.625	1.875	0.187	18700562-312B	0.562	0.937	0.312
12501625-250B	1.625	1.875	0.250	18700625-187B	0.625	1.000	0.187
12501750-125B	1.750	2.000	0.125	18700625-312B	0.625	1.000	0.312
12501750-250B	1.750	2.000	0.250	18700687-312B	0.687	1.062	0.312
12501875-125B	1.875	2.125	0.125	18700750-187B	0.750	1.125	0.187
12501875-187B	1.875	2.125	0.187	18700750-250B	0.750	1.125	0.250
12501875-250B	1.875	2.125	0.250	18700750-312B	0.750	1.125	0.312
12502000-187B	2.000	2.250	0.187	18700750-375B	0.750	1.125	0.375
12502000-250B	2.000	2.250	0.250	18700812-312B	0.812	1.187	0.312
12502125-250B	2.125	2.375	0.250	18700875-187B	0.875	1.250	0.187
12502250Q250B/V	2.250	2.500	0.250	18700875-312B	0.875	1.250	0.312
12502375-187B	2.375	2.625	0.187	18700937-312B	0.937	1.312	0.312
12502500-125B	2.500	2.750	0.125	18701000-187B	1.000	1.375	0.187
12502500-250B	2.500	2.750	0.250	18701000-250B	1.000	1.375	0.250
12502750-250B	2.750	3.000	0.250	18701000-312B	1.000	1.375	0.312
12502875-250B	2.875	3.125	0.250	18701000Q312B	1.000	1.375	0.312
12503625-187B	3.625	3.875	0.187	18701000Q312B/V	1.000	1.375	0.312
12503875-250B	3.875	4.125	0.250	18701000-375B	1.000	1.375	0.375
12504000Q125B	4.000	4.250	0.125	18701000N312B/P	1.000	1.375	0.312
12504250Q125B	4.250	4.500	0.125	18701062-312B	1.062	1.437	0.312
12504500-187B	4.500	4.750	0.187	18701125-187B	1.125	1.500	0.187
12504875-250B	4.875	5.125	0.250	18701125-250B	1.125	1.500	0.250
12506250-125B	6.250	6.500	0.125	18701125-312B	1.125	1.500	0.312
5/32" - Cross Section - 0.156"				18701125Q312B/V	1.125	1.500	0.312
15601000-156B	1.000	1.312	0.156	18701125-375B	1.125	1.500	0.375
15601000-230B	1.000	1.312	0.230	18701125N312B/P	1.125	1.500	0.312
15601500-312B	1.500	1.812	0.312	18701187-187B	1.187	1.562	0.187
3/16" - Cross Section - 0.187"				18701187-250B	1.187	1.562	0.250
18700187-187B	0.187	0.562	0.187	18701187-312B	1.187	1.562	0.312
18700250-187B	0.250	0.625	0.187	18701250-187B	1.250	1.625	0.187
				18701250-250B	1.250	1.625	0.250
				18701250-266B	1.250	1.625	0.266
				18701250-312B	1.250	1.625	0.312
				18701250Q312B/V	1.250	1.625	0.312

NOTE: MINIMUM LINE ORDER MAY APPLY



B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
3/16" - Cross Section - 0.187"				3/16" - Cross Section - 0.187"			
18701250-375B	1.250	1.625	0.375	18701875-187B	1.875	2.250	0.187
18701250N375B/P	1.250	1.625	0.375	18701875-266B	1.875	2.250	0.266
18701312-187B	1.312	1.687	0.187	18701875-375B	1.875	2.250	0.375
18701312-312B	1.312	1.687	0.312	18701875Q375B/V	1.875	2.250	0.375
18701312N312B/P	1.312	1.687	0.312	18701937-281B	1.937	2.312	0.281
18701375-187B	1.375	1.750	0.187	18702000-187B	2.000	2.375	0.187
18701375Q187B/V	1.375	1.750	0.187	18702000Q187B/V	2.000	2.375	0.187
18701375-250B	1.375	1.750	0.250	18702000-230B	2.000	2.375	0.230
18701375-312B	1.375	1.750	0.312	18702000-250B	2.000	2.375	0.250
18701375Q312B/V	1.375	1.750	0.312	18702000-312B	2.000	2.375	0.312
18701375N312B/P	1.375	1.750	0.312	18702000N312B/P	2.000	2.375	0.312
18701375-375B	1.375	1.750	0.375	18702000-375B	2.000	2.375	0.375
18701437-312B	1.437	1.812	0.312	18702000Q375B/V	2.000	2.375	0.375
18701500-187B	1.500	1.875	0.187	18702000N375B/P	2.000	2.375	0.375
18701500N187B/P	1.500	1.875	0.187	18702125-187B	2.125	2.500	0.187
18701500-250B	1.500	1.875	0.250	18702125-250B	2.125	2.500	0.250
18701500Q250B/V	1.500	1.875	0.250	18702125N250B/P	2.125	2.500	0.250
18701500N250B/P	1.500	1.875	0.250	18702125Q266B	2.125	2.500	0.266
18701500-266B	1.500	1.875	0.266	18702125-312B	2.125	2.500	0.312
18701500-312B	1.500	1.875	0.312	18702125-375B	2.125	2.500	0.375
18701500-375B	1.500	1.875	0.375	18702187-375B	2.187	2.562	0.375
18701500Q375B/V	1.500	1.875	0.375	18702250-187B	2.250	2.625	0.187
18701500N375B/P	1.500	1.875	0.375	18702250-312B	2.250	2.625	0.312
18701500-406B	1.500	1.875	0.406	18702250-375B	2.250	2.625	0.375
18701562Q187B	1.562	1.937	0.187	18702250N375B/P	2.250	2.625	0.375
18701562-375B	1.562	1.937	0.375	18702375-187B	2.375	2.750	0.187
18701625-187B	1.625	2.000	0.187	18702375-250B	2.375	2.750	0.250
18701625-250B	1.625	2.000	0.250	18702375-266B	2.375	2.750	0.266
18701625-266B	1.625	2.000	0.266	18702375-281B	2.375	2.750	0.281
18701625-312B	1.625	2.000	0.312	18702375-375B	2.375	2.750	0.375
18701625V312B/P	1.625	2.000	0.312	18702375-437B	2.375	2.750	0.437
18701625-375B	1.625	2.000	0.375	18702375-500B	2.375	2.750	0.500
18701625Q375B/V	1.625	2.000	0.375	18702500-187B	2.500	2.875	0.187
18701625N375B/P	1.625	2.000	0.375	18702500-250B	2.500	2.875	0.250
18701687-187B	1.687	2.062	0.187	18702500-312B	2.500	2.875	0.312
18701750-187B	1.750	2.125	0.187	18702500-375B	2.500	2.875	0.375
18701750-230B	1.750	2.125	0.230	18702500Q375B/V	2.500	2.875	0.375
18701750N230B/P	1.750	2.125	0.230	18702500N375B/P	2.500	2.875	0.375
18701750-250B	1.750	2.125	0.250	18702625-187B	2.625	3.000	0.187
18701750Q266B	1.750	2.125	0.266	18702625-250B	2.625	3.000	0.250
18701750-312B	1.750	2.125	0.312	18702625-281B	2.625	3.000	0.281
18701750-375B	1.750	2.125	0.375	18702625-312B	2.625	3.000	0.312
18701750Q375B/V	1.750	2.125	0.375	18702625-375B	2.625	3.000	0.375
18701750N375B/P	1.750	2.125	0.375	18702750-187B	2.750	3.125	0.187

NOTE: MINIMUM LINE ORDER MAY APPLY

INCH SIZE
ROD/PISTON SEALS





**INCH SIZE
ROD/PISTON SEALS**

B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
3/16" - Cross Section - 0.187"				3/16" - Cross Section - 0.187"			
18702750-281B	2.750	3.125	0.281	18704000-375B	4.000	4.375	0.375
18702750-312B	2.750	3.125	0.312	18704000Q375B/V	4.000	4.375	0.375
18702750-375B	2.750	3.125	0.375	18704000N375B/P	4.000	4.375	0.375
18702750Q375B/V	2.750	3.125	0.375	18704125Q187B	4.125	4.500	0.187
18702875Q187B	2.875	3.250	0.187	18704125-250B	4.125	4.500	0.250
18702875-250B	2.875	3.250	0.250	18704125-375B	4.125	4.500	0.375
18702875Q266B	2.875	3.250	0.266	18704250-281B	4.250	4.625	0.281
18702875-281B	2.875	3.250	0.281	18704250-312B	4.250	4.625	0.312
18702875-375B	2.875	3.250	0.375	18704250-375B	4.250	4.625	0.375
18703000-187B	3.000	3.375	0.187	18704375-375B	4.375	4.750	0.375
18703000-250B	3.000	3.375	0.250	18704500-187B	4.500	4.875	0.187
18703000-312B	3.000	3.375	0.312	18704500-375B	4.500	4.875	0.375
18703000-375B	3.000	3.375	0.375	18704500Q375B/V	4.500	4.875	0.375
18703000Q375B/V	3.000	3.375	0.375	18704500N375B/P	4.500	4.875	0.375
18703125-187B	3.125	3.500	0.187	18704625-250B	4.625	5.000	0.250
18703125-250B	3.125	3.500	0.250	18704625-312B	4.625	5.000	0.312
18703125-312B	3.125	3.500	0.312	18704625-375B	4.625	5.000	0.375
18703125-375B	3.125	3.500	0.375	18704750-375B	4.750	5.125	0.375
18703250-312B	3.250	3.625	0.312	18704875-375B	4.875	5.250	0.375
18703250-375B	3.250	3.625	0.375	18705000-281B	5.000	5.375	0.281
18703250N375B/P	3.250	3.625	0.375	18705000-375B	5.000	5.375	0.375
18703375-187B	3.375	3.750	0.187	18705125Q187B	5.125	5.500	0.187
18703375-250B	3.375	3.750	0.250	18705500-375B	5.500	5.875	0.375
18703375-375B	3.375	3.750	0.375	18705500-375B/V	5.500	5.875	0.375
18703375N375B/P	3.375	3.750	0.375	18705750Q375B	5.750	6.125	0.375
18703500-187B	3.500	3.875	0.187	18706000-375B	6.000	6.375	0.375
18703500-266B	3.500	3.875	0.266	18707000-375B	7.000	7.375	0.375
18703500-281B	3.500	3.875	0.281	7/32" - Cross Section - 0.218"			
18703500-312B	3.500	3.875	0.312	21802500Q218B	2.500	2.937	0.218
18703500-375B	3.500	3.875	0.375	21802562Q218B	2.562	3.000	0.218
18703500Q375B/V	3.500	3.875	0.375	1/4" - Cross Section - 0.250"			
18703500N375B/P	3.500	3.875	0.375	25000250-375B	0.250	0.750	0.375
18703625-187B	3.625	4.000	0.187	25000437-375B	0.437	0.937	0.375
18703625-250B	3.625	4.000	0.250	25000478-375B	0.478	0.978	0.375
18703625-312B	3.625	4.000	0.312	25000500-375B	0.500	1.000	0.375
18703625-375B	3.625	4.000	0.375	25000562-375B	0.562	1.062	0.375
18703750Q187B	3.750	4.125	0.187	25000625-312B	0.625	1.125	0.312
18703750-312B	3.750	4.125	0.312	25000625-375B	0.625	1.125	0.375
18703750-375B	3.750	4.125	0.375	25000687-375B	0.687	1.187	0.375
18703875-187B	3.875	4.250	0.187	25000750-250B	0.750	1.250	0.250
18703875-375B	3.875	4.250	0.375				
18704000-187B	4.000	4.375	0.187				
18704000-250B	4.000	4.375	0.250				
18704000-312B	4.000	4.375	0.312				

NOTE: MINIMUM LINE ORDER MAY APPLY



B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
1/4" - Cross Section - 0.250"				1/4" - Cross Section - 0.250"			
25000750-375B	0.750	1.250	0.375	25002250Q375B/V	2.250	2.750	0.375
25000812-375B	0.812	1.312	0.375	25002250N375B/P	2.250	2.750	0.375
25000875-250B	0.875	1.375	0.250	25002375-375B	2.375	2.875	0.375
25000875-312B	0.875	1.375	0.312	25002375-562B	2.375	2.875	0.562
25000875-375B	0.875	1.375	0.375	25002500-250B	2.500	3.000	0.250
25001000-250B	1.000	1.500	0.250	25002500-312B	2.500	3.000	0.312
25001000-375B	1.000	1.500	0.375	25002500-375B	2.500	3.000	0.375
25001000Q375B/V	1.000	1.500	0.375	25002500Q375B/V	2.500	3.000	0.375
25001125-250B	1.125	1.625	0.250	25002500N375B/P	2.500	3.000	0.375
25001125-375B	1.125	1.625	0.375	25002500-500B	2.500	3.000	0.500
25001250-250B	1.250	1.750	0.250	25002562-375B	2.562	3.062	0.375
25001250-375B	1.250	1.750	0.375	25002625-375B	2.625	3.125	0.375
25001250Q375B/V	1.250	1.750	0.375	25002750-250B	2.750	3.250	0.250
25001250N375B/P	1.250	1.750	0.375	25002750-375B	2.750	3.250	0.375
25001312-375B	1.312	1.812	0.375	25002750Q375B/V	2.750	3.250	0.375
25001375-250B	1.375	1.875	0.250	25002750N375B/P	2.750	3.250	0.375
25001375-375B	1.375	1.875	0.375	25002750-500B	2.750	3.250	0.500
25001375Q375B/V	1.375	1.875	0.375	25002875-375B	2.875	3.375	0.375
25001375N375B/P	1.375	1.875	0.375	25003000-250B	3.000	3.500	0.250
25001500-250B	1.500	2.000	0.250	25003000Q250B	3.000	3.500	0.250
25001500-312B	1.500	2.000	0.312	25003000-375B	3.000	3.500	0.375
25001500-375B	1.500	2.000	0.375	25003000Q375B/V	3.000	3.500	0.375
25001500Q375B/V	1.500	2.000	0.375	25003000N375B/P	3.000	3.500	0.375
25001500N375B/P	1.500	2.000	0.375	25003000V375B/P	3.000	3.500	0.375
25001500-500B	1.500	2.000	0.500	25003000-500B	3.000	3.500	0.500
25001625-375B	1.625	2.125	0.375	25003000-562B	3.000	3.500	0.562
25001750-250B	1.750	2.250	0.250	25003125-250B	3.125	3.625	0.250
25001750-312B	1.750	2.250	0.312	25003125-375B	3.125	3.625	0.375
25001750-375B	1.750	2.250	0.375	25003250-375B	3.250	3.750	0.375
25001750Q375B/V	1.750	2.250	0.375	25003250N375B/P	3.250	3.750	0.375
25001750V375B/P	1.750	2.250	0.375	25003250-500B	3.250	3.750	0.500
25001750N375B/NX	1.750	2.250	0.375	25003375-250B	3.375	3.875	0.250
25001875-375B	1.875	2.375	0.375	25003375-375B	3.375	3.875	0.375
25001937-375B	1.937	2.437	0.375	25003375N375B/P	3.375	3.875	0.375
25002000-250B	2.000	2.500	0.250	25003375-562B	3.375	3.875	0.562
25002000-312B	2.000	2.500	0.312	25003500-250B	3.500	4.000	0.250
25002000-375B	2.000	2.500	0.375	25003500-312B	3.500	4.000	0.312
25002000Q375B/V	2.000	2.500	0.375	25003500-375B	3.500	4.000	0.375
25002000N375B/P	2.000	2.500	0.375	25003500Q375B/V	3.500	4.000	0.375
25002000V375B/P	2.000	2.500	0.375	25003500N375B/P	3.500	4.000	0.375
25002125-250B	2.125	2.625	0.250	25003500V375B/P	3.500	4.000	0.375
25002125-375B	2.125	2.625	0.375	25003500N375B/U	3.500	4.000	0.375
25002187-375B	2.187	2.687	0.375	25003500-625B	3.500	4.000	0.625
25002250-375B	2.250	2.750	0.375	25003625-375B	3.625	4.125	0.375

NOTE: MINIMUM LINE ORDER MAY APPLY

INCH SIZE
ROD/PISTON SEALS





**INCH SIZE
ROD/PISTON SEALS**

B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
1/4" - Cross Section - 0.250"				1/4" - Cross Section - 0.250"			
25003690-500B	3.690	4.190	0.500	25004750-562B	4.750	5.250	0.562
25003750-250B	3.750	4.250	0.250	25004875-375B	4.875	5.375	0.375
25003750-375B	3.750	4.250	0.375	25004875-562B	4.875	5.375	0.562
25003750N375B/P	3.750	4.250	0.375	25005000-250B	5.000	5.500	0.250
25003750-500B	3.750	4.250	0.500	25005000-375B	5.000	5.500	0.375
25003750-562B	3.750	4.250	0.562	25005000Q375B/V	5.000	5.500	0.375
25003875-375B	3.875	4.375	0.375	25005000N375B/P	5.000	5.500	0.375
25004000-250B	4.000	4.500	0.250	25005000-500B	5.000	5.500	0.500
25004000-375B	4.000	4.500	0.375	25005000-562B	5.000	5.500	0.562
25004000Q375B/V	4.000	4.500	0.375	25005000N562B/P	5.000	5.500	0.562
25004000N375B/P	4.000	4.500	0.375	25005250Q250B	5.250	5.750	0.250
25004000-500B	4.000	4.500	0.500	25005250-375B	5.250	5.750	0.375
25004000-562B	4.000	4.500	0.562	25005250-562B	5.250	5.750	0.562
25004000N562B/P	4.000	4.500	0.562	25005375-562B	5.375	5.875	0.562
25004062-375B	4.062	4.562	0.375	25005437-375B	5.437	5.937	0.375
25004125-250B	4.125	4.625	0.250	25005500-375B	5.500	6.000	0.375
25004125-375B	4.125	4.625	0.375	25005500Q375B/V	5.500	6.000	0.375
25004125-562B	4.125	4.625	0.562	25005500N375B/P	5.500	6.000	0.375
25004250-250B	4.250	4.750	0.250	25005500-500B	5.500	6.000	0.500
25004250-375B	4.250	4.750	0.375	25005500-562B	5.500	6.000	0.562
25004250N375B/P	4.250	4.750	0.375	25005500N562B/P	5.500	6.000	0.562
25004250-562B	4.250	4.750	0.562	25005625-562B	5.625	6.125	0.562
25004250Q562B	4.250	4.750	0.562	25005750-375B	5.750	6.250	0.375
25004250Q562B/V	4.250	4.750	0.562	25005750N375B/P	5.750	6.250	0.375
25004375-250B	4.375	4.875	0.250	25005750-562B	5.750	6.250	0.562
25004375-562B	4.375	4.875	0.562	25005750Q562B/V	5.750	6.250	0.562
25004375N562B/P	4.375	4.875	0.562	25005750N562B/P	5.750	6.250	0.562
25004437-375B	4.437	4.937	0.375	25006000-375B	6.000	6.500	0.375
25004500-250B	4.500	5.000	0.250	25006000N375B/P	6.000	6.500	0.375
25004500N250B/P	4.500	5.000	0.250	25006000-437B	6.000	6.500	0.437
25004500-312B	4.500	5.000	0.312	25006000-500B	6.000	6.500	0.500
25004500-375B	4.500	5.000	0.375	25006000-562B	6.000	6.500	0.562
25004500N375B/P	4.500	5.000	0.375	25006000N562B/P	6.000	6.500	0.562
25004500-500B	4.500	5.000	0.500	25006250-375B	6.250	6.750	0.375
25004500-562B	4.500	5.000	0.562	25006250-562B	6.250	6.750	0.562
25004500-562B/V	4.500	5.000	0.562	25006500-250B	6.500	7.000	0.250
25004500N562B/P	4.500	5.000	0.562	25006500-375B	6.500	7.000	0.375
25004500-625B	4.500	5.000	0.625	25006500N375B/P	6.500	7.000	0.375
25004625-250B	4.625	5.125	0.250	25006500-500B	6.500	7.000	0.500
25004625-562B	4.625	5.125	0.562	25006500-562B	6.500	7.000	0.562
25004625N562B/P	4.625	5.125	0.562	25006500N562B/P	6.500	7.000	0.562
25004750Q250B	4.750	5.250	0.250	25006750-375B	6.750	7.250	0.375
25004750-375B	4.750	5.250	0.375	25006750-500B	6.750	7.250	0.500
25004750-500B	4.750	5.250	0.500	25006750-562B	6.750	7.250	0.562

NOTE: MINIMUM LINE ORDER MAY APPLY



B SERIES - LOADED U-CUPS

INCH SIZE
ROD/PISTON SEALS

Ref.Number	Nominal Seal Dimensions		
	d	D	H
1/4" - Cross Section - 0.250"			
25007000-375B	7.000	7.500	0.375
25007000-500B	7.000	7.500	0.500
25007000-562B	7.000	7.500	0.562
25007000Q562B/V	7.000	7.500	0.562
25007000N562B/P	7.000	7.500	0.562
25007250-375B	7.250	7.750	0.375
25007250N375B/P	7.250	7.750	0.375
25007250-562B	7.250	7.750	0.562
25007250N562B/P	7.250	7.750	0.562
25007500-250B	7.500	8.000	0.250
25007500-375B	7.500	8.000	0.375
25007500-500B	7.500	8.000	0.500
25007500-562B	7.500	8.000	0.562
25007750-562B	7.750	8.250	0.562
25008000-375B	8.000	8.500	0.375
25008000-562B	8.000	8.500	0.562
25008000-562B/V	8.000	8.500	0.562
25008000N562B/P	8.000	8.500	0.562
25008125-562B	8.125	8.625	0.562
25008250-375B	8.250	8.750	0.375
25008250-437B	8.250	8.750	0.437
25008250-562B	8.250	8.750	0.562
25008500-375B	8.500	9.000	0.375
25008500-500B	8.500	9.000	0.500
25008500-562B	8.500	9.000	0.562
25008500N562B/P	8.500	9.000	0.562
25009000-375B	9.000	9.500	0.375
25009000N375B/P	9.000	9.500	0.375
25009000-562B	9.000	9.500	0.562
25009000N562B/P	9.000	9.500	0.562
25009250-562B	9.250	9.750	0.562
25009500-562B	9.500	10.000	0.562
25009750-375B	9.750	10.250	0.375
25009750-562B	9.750	10.250	0.562
25010000-562B	10.000	10.500	0.562
25010000N562B/P	10.000	10.500	0.562
25010250-562B	10.250	10.750	0.562
25010500-375B	10.500	11.000	0.375
25010500-562B	10.500	11.000	0.562
25010750-562B	10.750	11.250	0.562
25011000-562B	11.000	11.500	0.562
25011250-375B	11.250	11.750	0.375
25011250-562B	11.250	11.750	0.562
25012500Q531B	12.500	13.000	0.531

Ref.Number	Nominal Seal Dimensions		
	d	D	H
1/4" - Cross Section - 0.250"			
25012750-562B	12.750	13.250	0.562
25013000-562B	13.000	13.500	0.562
25013500-531B	13.500	14.000	0.531
25015000-562B	15.000	15.500	0.562
25021750-375B	21.750	22.250	0.375
25022062-375B	22.062	22.562	0.375
25023000-375B	23.000	23.500	0.375
25023750-375B	23.750	24.250	0.375
25024000-375B	24.000	24.500	0.375
25025250-375B	25.250	25.750	0.375
0.275" - Cross Section - 0.275"			
27501970-500B	1.970	2.520	0.500
27502970-500B	2.970	3.520	0.500
27503970-500B	3.970	4.520	0.500
27504970-500B	4.970	5.520	0.500
9/32" - Cross Section - 0.281"			
28102200-500B	2.200	2.770	0.500
28102250-375B	2.250	2.812	0.375
28102937-500B	2.937	3.500	0.500
28103187-500B	3.187	3.750	0.500
28103200-500B	3.200	3.770	0.500
28103437-500B	3.437	4.000	0.500
28103937-500B	3.937	4.500	0.500
28104437-500B	4.437	5.000	0.500
28104687-625B	4.687	5.250	0.625
28104937-343B	4.937	5.500	0.343
28104937-500B	4.937	5.500	0.500
28105000-346B/V	5.000	5.562	0.346
28105437-562B	5.437	6.000	0.562
28105937-500B	5.937	6.500	0.500
28106937-500B	6.937	7.500	0.500
28108937-500B	8.937	9.500	0.500
5/16" - Cross Section - 0.312"			
31200353-375B	0.353	0.977	0.375
31200750-500B	0.750	1.375	0.500
31200812-500B	0.812	1.437	0.500
31201000-375B	1.000	1.625	0.375
31201000-500B	1.000	1.625	0.500

NOTE: MINIMUM LINE ORDER MAY APPLY





**INCH SIZE
ROD/PISTON SEALS**

B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
5/16" - Cross Section - 0.312"				5/16" - Cross Section - 0.312"			
31201125-312B	1.125	1.750	0.312	31203000Q312B	3.000	3.625	0.312
31201125-375B	1.125	1.750	0.375	31203000-375B	3.000	3.625	0.375
31201125-500B	1.125	1.750	0.500	31203000-500B	3.000	3.625	0.500
31201250-312B	1.250	1.875	0.312	31203000Q500B/V	3.000	3.625	0.500
31201250-375B	1.250	1.875	0.375	31203000N500B/P	3.000	3.625	0.500
31201250-500B	1.250	1.875	0.500	31203125-312B	3.125	3.750	0.312
31201250Q500B/V	1.250	1.875	0.500	31203125-500B	3.125	3.750	0.500
31201375-312B	1.375	2.000	0.312	31203250-312B	3.250	3.875	0.312
31201375-375B	1.375	2.000	0.375	31203250-500B	3.250	3.875	0.500
31201375-500B	1.375	2.000	0.500	31203250N500B/P	3.250	3.875	0.500
31201375Q500B/V	1.375	2.000	0.500	31203375-312B	3.375	4.000	0.312
31201437-500B	1.437	2.062	0.500	31203375-500B	3.375	4.000	0.500
31201500-312B	1.500	2.125	0.312	31203375-625B	3.375	4.000	0.625
31201500-375B	1.500	2.125	0.375	31203500-375B	3.500	4.125	0.375
31201500-437B	1.500	2.125	0.437	31203500-500B	3.500	4.125	0.500
31201500-500B	1.500	2.125	0.500	31203500N500B/P	3.500	4.125	0.500
31201625-375B	1.625	2.250	0.375	31203625-500B	3.625	4.250	0.500
31201625-500B	1.625	2.250	0.500	31203750Q312B	3.750	4.375	0.312
31201687-500B	1.687	2.312	0.500	31203750-375B	3.750	4.375	0.375
31201750-375B	1.750	2.375	0.375	31203750-500B	3.750	4.375	0.500
31201750-500B	1.750	2.375	0.500	31203750-625B	3.750	4.375	0.625
31201875-375B	1.875	2.500	0.375	31203750N500B/P	3.750	4.375	0.500
31201875-500B	1.875	2.500	0.500	31203875-500B	3.875	4.500	0.500
31202000-375B	2.000	2.625	0.375	31204000N375B/P	4.000	4.625	0.375
31202000-500B	2.000	2.625	0.500	31204000-500B	4.000	4.625	0.500
31202000Q500B/V	2.000	2.625	0.500	31204000-562B	4.000	4.625	0.562
31202000N500B/P	2.000	2.620	0.500	31204000N562B/P	4.000	4.625	0.562
31202000-562B	2.000	2.625	0.562	31204125-500B	4.125	4.750	0.500
31202125-312B	2.125	2.750	0.312	31204125-562B	4.125	4.750	0.562
31202125-500B	2.125	2.750	0.500	31204125-625B	4.125	4.750	0.625
31202125-625B	2.125	2.750	0.625	31204250-312B	4.250	4.875	0.312
31202250-312B	2.250	2.875	0.312	31204250-500B	4.250	4.875	0.500
31202250-500B	2.250	2.875	0.500	31204250-562B	4.250	4.875	0.562
31202375-312B	2.375	3.000	0.312	31204250N562B/P	4.250	4.875	0.562
31202375-500B	2.375	3.000	0.500	31204375-312B	4.375	5.000	0.312
31202500-375B	2.500	3.125	0.375	31204375-500B	4.375	5.000	0.500
31202500-500B	2.500	3.125	0.500	31204375-562B	4.375	5.000	0.562
31202500-500B/V	2.500	3.125	0.500	31204375-625B	4.375	5.000	0.625
31202500N500B/P	2.500	3.125	0.500	31204500-375B	4.500	5.125	0.375
31202625-500B	2.625	3.250	0.500	31204500-500B	4.500	5.125	0.500
31202750-375B	2.750	3.375	0.375	31204500-562B	4.500	5.125	0.562
31202750-500B	2.750	3.375	0.500	31204500-625B	4.500	5.125	0.625
31202750N500B/P	2.750	3.375	0.500	31204625-625B	4.625	5.250	0.625
31202875-500B	2.875	3.500	0.500	31204750-500B	4.750	5.375	0.500

NOTE: MINIMUM LINE ORDER MAY APPLY



B SERIES - LOADED U-CUPS

INCH SIZE
ROD/PISTON SEALS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
5/16" - Cross Section - 0.312"				3/8" - Cross Section - 0.375"			
31204750N500B/P	4.750	5.375	0.500	37501625-375B	1.625	2.375	0.375
31204750-625B	4.750	5.375	0.625	37501625-625B	1.625	2.375	0.625
31205000-625B	5.000	5.625	0.625	37501750-500B	1.750	2.500	0.500
31205125-625B	5.125	5.750	0.625	37501750-625B	1.750	2.500	0.625
31205250-625B	5.250	5.875	0.625	37502000-375B	2.000	2.750	0.375
31205375-312B	5.375	6.000	0.312	37502000-500B	2.000	2.750	0.500
31205375-625B	5.375	6.000	0.625	37502000-625B	2.000	2.750	0.625
31205500-312B	5.500	6.125	0.312	37502000N625B/P	2.000	2.750	0.625
31205500-625B	5.500	6.125	0.625	37502250-375B	2.250	3.000	0.375
31205625-625B	5.625	6.250	0.625	37502250-500B	2.250	3.000	0.500
31205750-625B	5.750	6.375	0.625	37502250-625B	2.250	3.000	0.625
31205750N625B/P	5.750	6.375	0.625	37502375-625B	2.375	3.125	0.625
31206000-625B	6.000	6.625	0.625	37502500-375B	2.500	3.250	0.375
31206375-625B	6.375	7.000	0.625	37502500-500B	2.500	3.250	0.500
31206500-625B	6.500	7.125	0.625	37502500-625B	2.500	3.250	0.625
31206625-625B	6.625	7.250	0.625	37502500-625B/V	2.500	3.250	0.625
31206750-625B	6.750	7.375	0.625	37502625-625B	2.625	3.375	0.625
31207000-625B	7.000	7.625	0.625	37502750-500B	2.750	3.500	0.500
31207250-625B	7.250	7.875	0.625	37502750-625B	2.750	3.500	0.625
31207375Q312B	7.375	8.000	0.312	37502750Q625B/V	2.750	3.500	0.625
31207375-500B	7.375	8.000	0.500	37502875-625B	2.875	3.625	0.625
31207375-625B	7.375	8.000	0.625	37503000-375B	3.000	3.750	0.375
31207875-625B	7.875	8.500	0.625	37503000-500B	3.000	3.750	0.500
31208000-500B	8.000	8.625	0.500	37503000-625B	3.000	3.750	0.625
31208000-625B	8.000	8.625	0.625	37503000Q625B/V	3.000	3.750	0.625
31208500-625B	8.500	9.125	0.625	37503000N625B/P	3.000	3.750	0.625
31209125-625B	9.125	9.750	0.625	37503125-375B	3.125	3.875	0.375
31209250-625B	9.250	9.875	0.625	37503125-625B	3.125	3.875	0.625
31209375-625B	9.375	10.000	0.625	37503250-500B	3.250	4.000	0.500
31209375N625B/P	9.375	10.000	0.625	37503250-625B	3.250	4.000	0.625
31209625-625B	9.625	10.250	0.625	37503250N625B/P	3.250	4.000	0.625
31209750-625B	9.750	10.375	0.625	37503375-625B	3.375	4.125	0.625
31210375-625B	10.375	11.000	0.625	37503500-500B	3.500	4.250	0.500
31212500-625B	12.500	13.125	0.625	37503500-625B	3.500	4.250	0.625
3/8" - Cross Section - 0.375"				37503500Q625B/V	3.500	4.250	0.625
37500812Q375B	0.812	1.562	0.375	37503500N625B/P	3.500	4.250	0.625
37501250-375B	1.250	2.000	0.375	37503625-500B	3.625	4.375	0.500
37501250-500B	1.250	2.000	0.500	37503625-625B	3.625	4.375	0.625
37501250-625B	1.250	2.000	0.625	37503750-375B	3.750	4.500	0.375
37501375-625B	1.375	2.125	0.625	37503750-500B	3.750	4.500	0.500
37501500-500B	1.500	2.250	0.500	37503750-625B	3.750	4.500	0.625
37501500-625B	1.500	2.250	0.625	37503750Q625B/V	3.750	4.500	0.625
				37503750N625B/P	3.750	4.500	0.625
				37503875-625B	3.875	4.625	0.625

NOTE: MINIMUM LINE ORDER MAY APPLY





**INCH SIZE
ROD/PISTON SEALS**

B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
3/8" - Cross Section - 0.375"				3/8" - Cross Section - 0.375"			
37504000-500B	4.000	4.750	0.500	37505750N625B/P	5.750	6.500	0.625
37504000-625B	4.000	4.750	0.625	37505750V625B/P	5.750	6.500	0.625
37504000Q625B/V	4.000	4.750	0.625	37505875-625B	5.875	6.625	0.625
37504000N625B/P	4.000	4.750	0.625	37506000Q375B	6.000	6.750	0.375
37504125-625B	4.125	4.875	0.625	37506000-500B	6.000	6.750	0.500
37504250-375B	4.250	5.000	0.375	37506000-625B	6.000	6.750	0.625
37504250-500B	4.250	5.000	0.500	37506000N625B/P	6.000	6.750	0.625
37504250-625B	4.250	5.000	0.625	37506000V625B/P	6.000	6.750	0.625
37504250-625B/V	4.250	5.000	0.625	37506250-500B	6.250	7.000	0.500
37504250N625B/P	4.250	5.000	0.625	37506250-625B	6.250	7.000	0.625
37504375-625B	4.375	5.125	0.625	37506250N625B/P	6.250	7.000	0.625
37504500-375B	4.500	5.250	0.375	37506500Q375B	6.500	7.250	0.375
37504500-500B	4.500	5.250	0.500	37506500-500B	6.500	7.250	0.500
37504500-625B	4.500	5.250	0.625	37506500-625B	6.500	7.250	0.625
37504500N625B/P	4.500	5.250	0.625	37506500N625B/P	6.500	7.250	0.625
37504500V625B/P	4.500	5.250	0.625	37506750-375B	6.750	7.500	0.375
37504625-625B	4.625	5.375	0.625	37506750-500B	6.750	7.500	0.500
37504750-375B	4.750	5.500	0.375	37506750-625B	6.750	7.500	0.625
37504750-500B	4.750	5.500	0.500	37506875-625B	6.875	7.625	0.625
37504750-625B	4.750	5.500	0.625	37507000-500B	7.000	7.750	0.500
37504750N625B/P	4.750	5.500	0.625	37507000N500B/P	7.000	7.750	0.500
37504875Q375B	4.875	5.625	0.375	37507000V500B/F	7.000	7.750	0.500
37504875-625B	4.875	5.625	0.625	37507000-625B	7.000	7.750	0.625
37505000Q375B	5.000	5.750	0.375	37507000N625B/P	7.000	7.750	0.625
37505000-500B	5.000	5.750	0.500	37507250-375B	7.250	8.500	0.375
37505000-625B	5.000	5.750	0.625	37507250-500B	7.250	8.000	0.500
37505000Q625B/V	5.000	5.750	0.625	37507250-625B	7.250	8.000	0.625
37505000N625B/P	5.000	5.750	0.625	37507250-750B	7.250	8.000	0.750
37505125-625B	5.125	5.875	0.625	37507250N625B/P	7.250	8.000	0.625
37505250-375B	5.250	6.000	0.375	37507375-500B	7.375	8.125	0.500
37505250-500B	5.250	6.000	0.500	37507500-500B	7.500	8.250	0.500
37505250-625B	5.250	6.000	0.625	37507500-625B	7.500	8.250	0.625
37505250N625B/P	5.250	6.000	0.625	37507500N625B/P	7.500	8.250	0.625
37505250-750B	5.250	6.000	0.750	37507750Q375B	7.750	8.500	0.375
37505375-625B	5.375	6.125	0.625	37507750-500B	7.750	8.500	0.500
37505500Q375B	5.500	6.250	0.375	37507750-625B	7.750	8.500	0.625
37505500-500B	5.500	6.250	0.500	37507790-375B	7.790	8.540	0.375
37505500-625B	5.500	6.250	0.625	37508000-625B	8.000	8.750	0.625
37505500N625B/P	5.500	6.250	0.625	37508000Q625B/V	8.000	8.750	0.625
37505500V625B/P	5.500	6.250	0.625	37508000N625B/P	8.000	8.750	0.625
37505625-625B	5.625	6.375	0.625	37508250-625B	8.250	9.000	0.625
37505750-500B	5.750	6.500	0.500	37508250N625B/P	8.250	9.000	0.625
37505750N500B/P	5.750	6.500	0.500	37508500-625B	8.500	9.250	0.625
37505750-625B	5.750	6.500	0.625	37508750-500B	8.750	9.500	0.500

NOTE: MINIMUM LINE ORDER MAY APPLY



B SERIES - LOADED U-CUPS

INCH SIZE
ROD/PISTON SEALS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
3/8" - Cross Section - 0.375"				7/16" - Cross Section - 0.437"			
37508750-750B	8.750	9.500	0.750	43704000-625B	4.000	4.875	0.625
37508795-375B	8.795	9.545	0.375	43704500-750B	4.500	5.375	0.750
37508875-625B	8.875	9.625	0.625	43704750-750B	4.750	5.625	0.750
37509000Q375B	9.000	9.750	0.375	43704875-562B	4.875	5.750	0.562
37509000-625B	9.000	9.750	0.625	43705000-750B	5.000	5.875	0.750
37509000V625B/P	9.000	9.750	0.625	43713125-437B	13.125	14.000	0.437
37509250-625B	9.250	10.000	0.625	1/2" - Cross Section - 0.500"			
37509500-625B	9.500	10.250	0.625	50001125-750B	1.125	2.125	0.750
37509500N625B/P	9.500	10.250	0.625	50001500-750B	1.500	2.500	0.750
37509750-625B	9.750	10.500	0.625	50001750-750B	1.750	2.750	0.750
37510000-625B	10.000	10.750	0.625	50001875-625B	1.875	2.875	0.625
37510250-500B	10.250	11.000	0.500	50002000Q500B	2.000	3.000	0.500
37510250-750B	10.250	11.000	0.750	50002000-750B	2.000	3.000	0.750
37510500Q375B	10.500	11.250	0.375	50002375Q500B	2.375	3.375	0.500
37510500-625B	10.500	11.250	0.625	50002500-750B	2.500	3.500	0.750
37510750-625B	10.750	11.500	0.625	50003000-625B	3.000	4.000	0.625
37510750N625B/P	10.750	11.500	0.625	50003000-750B	3.000	4.000	0.750
37511000-625B	11.000	11.750	0.625	50003250-750B	3.250	4.250	0.750
37511250-625B	11.250	12.000	0.625	50003375-625B	3.375	4.375	0.625
37511500-625B	11.500	12.250	0.625	50003500-750B	3.500	4.500	0.750
37511750-625B	11.750	12.500	0.625	50003750-690B	3.750	4.750	0.690
37511750-750B	11.750	12.500	0.750	50003875-750B	3.875	4.875	0.750
37512000-625B	12.000	12.750	0.625	50004000-750B	4.000	5.000	0.750
37512000N625B/P	12.000	12.750	0.625	50004250-750B	4.250	5.250	0.750
37512250-625B	12.250	13.000	0.625	50004375-625B	4.375	5.375	0.625
37512750-625B	12.750	13.500	0.625	50004375-750B	4.375	5.375	0.750
37513000-375B	13.000	13.750	0.375	50004500-500B	4.500	5.500	0.500
37513000-625B	13.000	13.750	0.625	50004500-750B	4.500	5.500	0.750
37513500-625B	13.500	14.250	0.625	50004500N750B/P	4.500	5.500	0.750
37513750-625B	13.750	14.500	0.625	50004750-687B	4.750	5.750	0.687
37514250-625B	14.250	15.000	0.625	50004750-750B	4.750	5.750	0.750
37514750-625B	14.750	15.500	0.625	50005000Q500B	5.000	6.000	0.500
37519250-625B	19.250	20.000	0.625	50005000-750B	5.000	6.000	0.750
37520750-500B	20.750	21.500	0.500	50005250 750B	5.250	6.250	0.750
7/16" - Cross Section - 0.437"				50005250-500B	5.250	6.250	0.500
43701125-500B	1.125	2.000	0.500	50005250-750B	5.250	6.250	0.750
43702250-625B	2.250	3.125	0.625	50005375Q750B	5.375	6.375	0.750
43702500-625B	2.500	3.375	0.625	50005500-750B	5.500	6.500	0.750
43703125-687B	3.125	4.000	0.687	50005750-750B	5.750	6.750	0.750
43703375-500B	3.375	4.250	0.500	50005750N750B/P	5.750	6.750	0.750
43703875-500B	3.875	4.750	0.500	50006000-500B	6.000	7.000	0.500
43703875-750B	3.875	4.750	0.750	50006000-750B	6.000	7.000	0.750

NOTE: MINIMUM LINE ORDER MAY APPLY





**INCH SIZE
ROD/PISTON SEALS**

B SERIES - LOADED U-CUPS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
1/2" - Cross Section - 0.500"				1/2" - Cross Section - 0.500"			
50006000-750B/V	6.000	7.000	0.750	50013500-750B	13.500	14.500	0.750
50006000N750B/P	6.000	7.000	0.750	50014000-750B	14.000	15.000	0.750
50006250-750B	6.250	7.250	0.750	50014420-500B	14.420	15.420	0.500
50006500-750B	6.500	7.500	0.750	50014750-750B	14.750	15.750	0.750
50006500N750B/P	6.500	7.500	0.750	50015000-750B	15.000	16.000	0.750
50006750-750B	6.750	7.750	0.750	50015000N750B/P	15.000	16.000	0.750
50006750N750B/P	6.750	7.750	0.750	50015250-750B	15.250	16.250	0.750
50007000-750B	7.000	8.000	0.750	50015500-750B	15.500	16.500	0.750
50007000Q750B/V	7.000	8.000	0.750	50015750Q750B	15.750	16.750	0.750
50007000N750B/P	7.000	8.000	0.750	50016500-750B	16.500	17.500	0.750
50007250-750B	7.250	8.250	0.750	50016500Q750B	16.500	17.500	0.750
50007500-750B	7.500	8.500	0.750	50016750-750B	16.750	17.750	0.750
50007500N750B/P	7.500	8.500	0.750	50017000Q750B	17.000	18.000	0.750
50007750-750B	7.750	8.750	0.750	50017500-750B	17.500	18.500	0.750
50008000Q500B	8.000	9.000	0.500	50018000-750B	18.000	19.000	0.750
50008000-750B	8.000	9.000	0.750	50019000Q750B	19.000	20.000	0.750
50008000N750B/P	8.000	9.000	0.750	50020000-750B	20.000	21.000	0.750
50008250-750B	8.250	9.250	0.750	50020250-750B	20.250	21.250	0.750
50008500-750B	8.500	9.500	0.750	50021000-750B	21.000	22.000	0.750
50008500N750B/P	8.500	9.500	0.750	50022000-750B	22.000	23.000	0.750
50008750-750B	8.750	9.750	0.750	50024000-750B	24.000	25.000	0.750
50009000-750B	9.000	10.000	0.750	50024500-750B	24.500	25.500	0.750
50009000N750B/P	9.000	10.000	0.750	50024875-750B	24.875	25.875	0.750
50009250-750B	9.250	10.250	0.750	50026125-750B	26.125	27.125	0.750
50009500-750B	9.500	10.500	0.750	50026500-750B	26.500	27.500	0.750
50009500N750B/P	9.500	10.500	0.750	50029000-750B	29.000	30.000	0.750
50010000-750B	10.000	11.000	0.750	50029750-750B	29.750	30.750	0.750
50010000N750B/P	10.000	11.000	0.750	50030750-750B	30.750	31.750	0.750
50010250-750B	10.250	11.250	0.750	50031500-750B	31.500	32.500	0.750
50010500-750B	10.500	11.500	0.750	50038000-750B	38.000	39.000	0.750
50010625-750B	10.625	11.625	0.750	50038250-750B	38.250	39.250	0.750
50010750-750B	10.750	11.750	0.750	50038750-750B	38.750	39.750	0.750
50011000-750B	11.000	12.000	0.750	50041000-750B	41.000	42.000	0.750
50011000N750B/P	11.000	12.000	0.750	50041750-750B	41.750	42.750	0.750
50011375-750B	11.375	12.375	0.750	50042000-750B	42.000	43.000	0.750
50011500-750B	11.500	12.500	0.750	50043500-750B	43.500	44.500	0.750
50011750-750B	11.750	12.750	0.750	50044125-750B	44.125	45.125	0.750
50012000-750B	12.000	13.000	0.750	50046250-750B	46.250	47.250	0.750
50012000V750B/P	12.000	13.000	0.750	50047500-750B	47.500	48.500	0.750
50012125-750B	12.125	13.125	0.750	9/16" - Cross Section - 0.562"			
50012250-750B	12.250	13.250	0.750	56202375-875B	2.375	3.500	0.875
50012500-750B	12.500	13.500	0.750	56212562-875B	12.562	13.687	0.875
50013000-750B	13.000	14.000	0.750				
50013250-750B	13.250	14.250	0.750				

NOTE: MINIMUM LINE ORDER MAY APPLY



B SERIES - LOADED U-CUPS

INCH SIZE
ROD/PISTON SEALS

Ref.Number	Nominal Seal Dimensions			Ref.Number	Nominal Seal Dimensions		
	d	D	H		d	D	H
5/8" - Cross Section - 0.625"				3/4" - Cross Section - 0.750"			
62502750-1000B	2.750	4.000	1.000	75008500-1125B	8.500	10.000	1.125
62502875-1000B	2.875	4.125	1.000	75009000-1250B	9.000	10.500	1.250
62503250-1000B	3.250	4.500	1.000	75009750-1250B	9.750	11.250	1.250
62503750-1000B	3.750	5.000	1.000	75010000Q1250B	10.000	11.500	1.250
62504250-1000B	4.250	5.500	1.000	75010500-1000B	10.500	12.000	1.000
62505000-1000B	5.000	6.250	1.000	75011500-1250B	11.500	13.000	1.250
62505250-1000B	5.250	6.500	1.000	75012000-1250B	12.000	13.500	1.250
62505500-1000B	5.500	6.750	1.000	75012500-1250B	12.500	14.000	1.250
62505750-1000B	5.750	7.000	1.000	75013000-1000B	13.000	14.500	1.000
62506000-1000B	6.000	7.250	1.000	75014000-1250B	14.000	15.500	1.250
62506750-1000B	6.750	8.000	1.000	75015625-1250B	15.625	17.125	1.250
62507000-1000B	7.000	8.250	1.000	75017375-1250B	17.375	18.875	1.250
62507250-1000B	7.250	8.500	1.000	75017625-1250B	17.625	19.125	1.250
62507500-1000B	7.500	8.750	1.000	75019000-1250B	19.000	20.500	1.250
62507750-1000B	7.750	9.000	1.000	75020000-1000B	20.000	21.500	1.000
62508250-1000B	8.250	9.500	1.000	75020000Q1250B	20.000	21.500	1.250
62508500-1000B	8.500	9.750	1.000	75020500-1000B	20.500	22.000	1.000
62509000-1000B	9.000	10.250	1.000	75023500-1250B	23.500	25.000	1.250
62509000V1000B/P	9.000	10.250	1.000	7/8" - Cross Section - 0.875"			
62509750-1000B	9.750	11.000	1.000	87519937-1375B	19.937	21.687	1.375
62510000-1000B	10.000	11.250	1.000	87536000-1375B	36.000	37.750	1.375
62510500-750B	10.500	11.750	0.750	1" - Cross Section - 1.000"			
62511000-1000B	11.000	12.250	1.000	10012000-1500B	12.000	14.000	1.500
62511250Q1000B	11.250	12.500	1.000	10015000-1500B	15.000	17.000	1.500
62511500-1000B	11.500	12.750	1.000	10016000-1250B	16.000	18.000	1.250
62511750-1000B	11.750	13.000	1.000	10017500-1500B	17.500	19.500	1.500
62512000-1000B	12.000	13.250	1.000	10021250-1500B	21.250	23.250	1.500
62512250-1000B	12.250	13.500	1.000	10024000-1500B	24.000	26.000	1.500
62513500-875B	13.500	14.750	0.875	10026000-1500B	26.000	28.000	1.500
62514000-1000B	14.000	15.250	1.000	10029000-1500B	29.000	31.000	1.500
62514750Q1000B	14.750	16.000	1.000	10030000-1500B	30.000	32.000	1.500
62515500Q1000B	15.500	16.750	1.000	10030000N1500B/P	30.000	32.000	1.500
62517750-1000B	17.750	19.000	1.000	10033375-1500B	33.375	35.375	1.500
62518000-1000B	18.000	19.250	1.000				
62518750-1000B	18.750	20.000	1.000				
62519000-1250B	19.000	20.250	1.250				
62519750-1000B	19.750	21.000	1.000				
62530000-1000B	30.000	31.250	1.000				
3/4" - Cross Section - 0.750"							
75003500-750B	3.500	5.000	0.750				
75008000-1125B	8.000	9.500	1.125				
75008000-1250B	8.000	9.500	1.250				

NOTE: MINIMUM LINE ORDER MAY APPLY

